

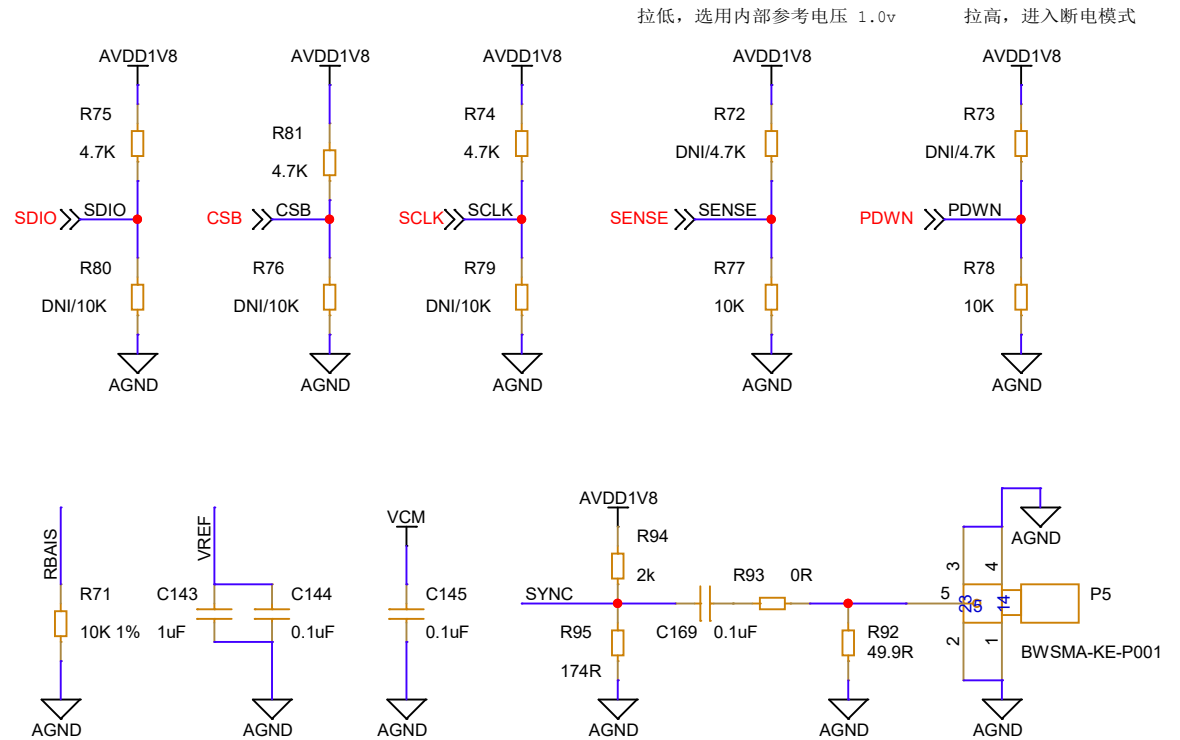
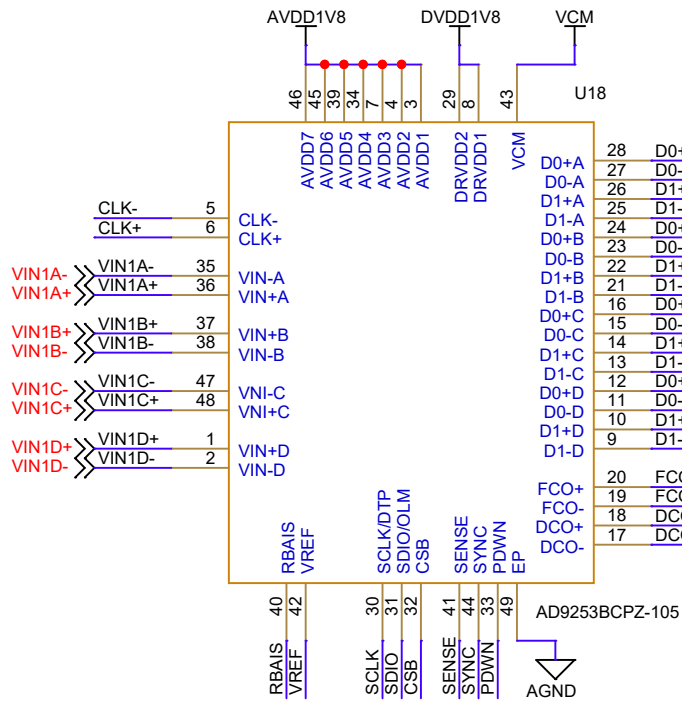
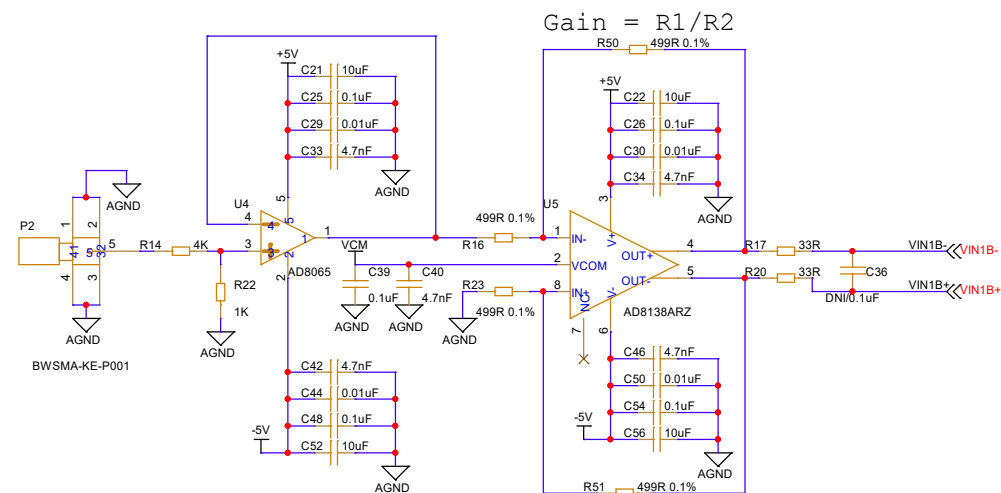
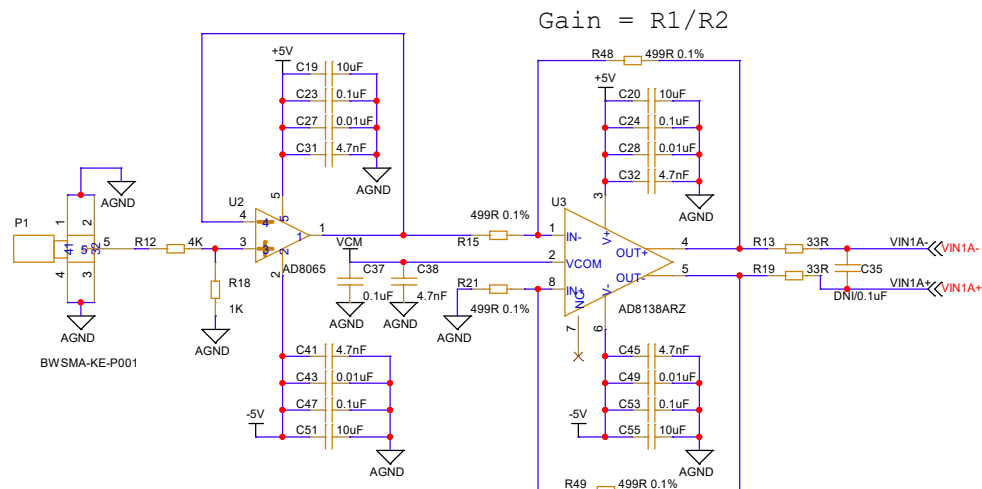


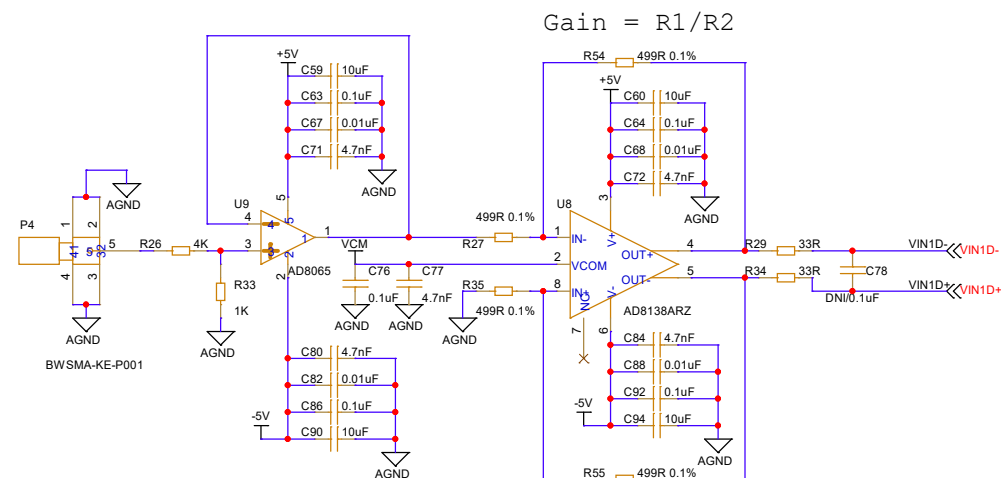

因为运放是负极输入，所以这里需要调换输出差分



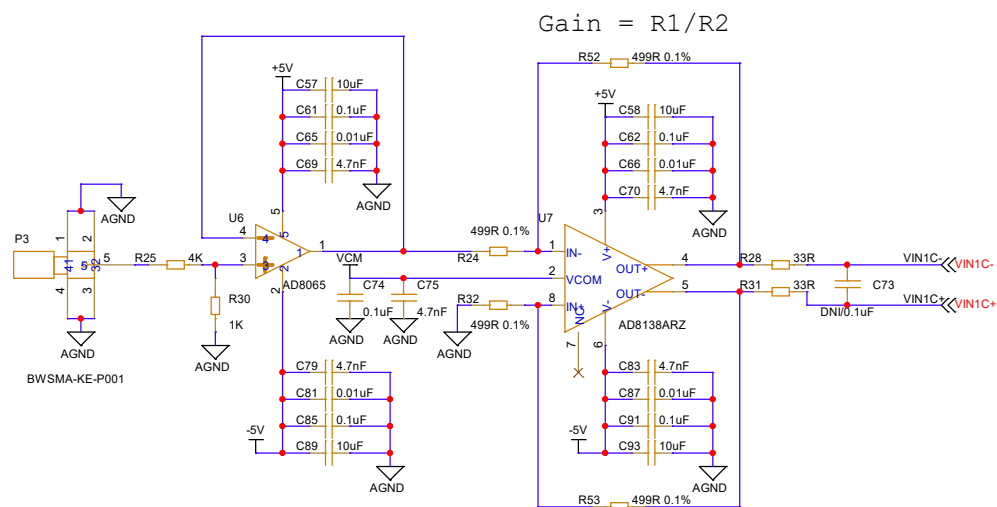


武汉芯路恒科技有限公司



Title			ACM9253
Size	File	Version	
A3	02_VIN	26.4.23	
Date:	Tuesday, June 02, 2026	Sheet	2 of 5





$$V_{out} = 1.221 * (R1 / R2 + 1)$$

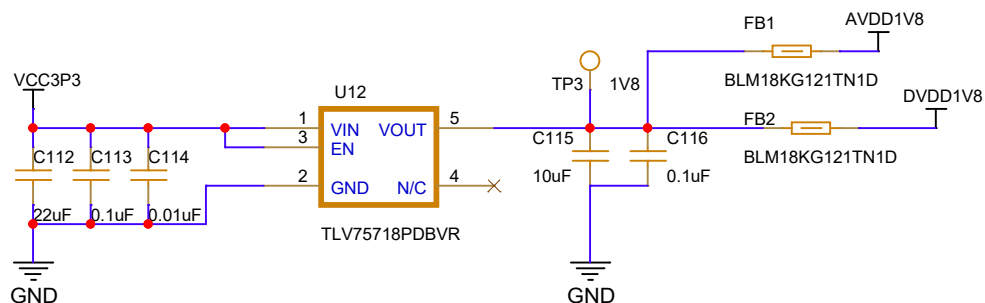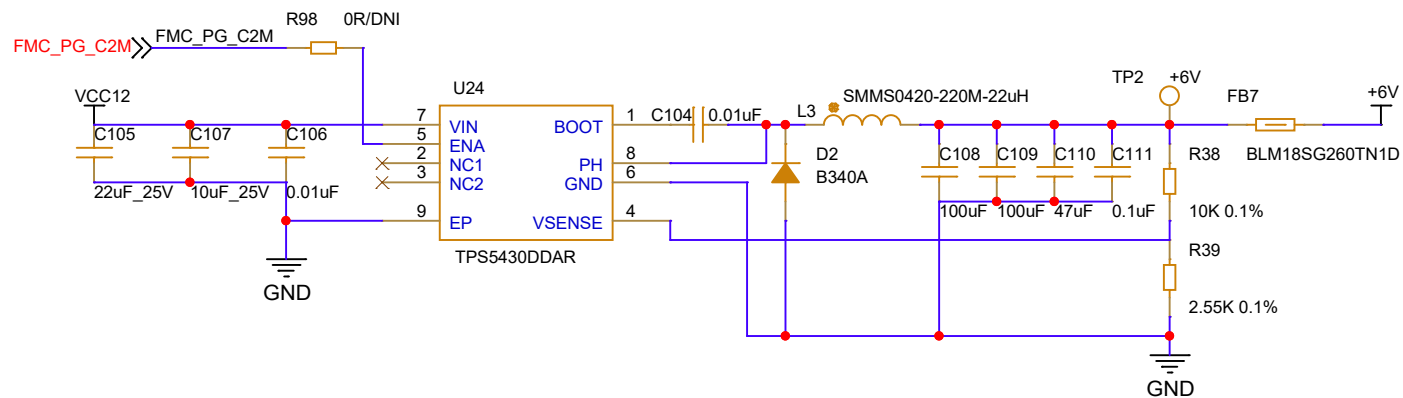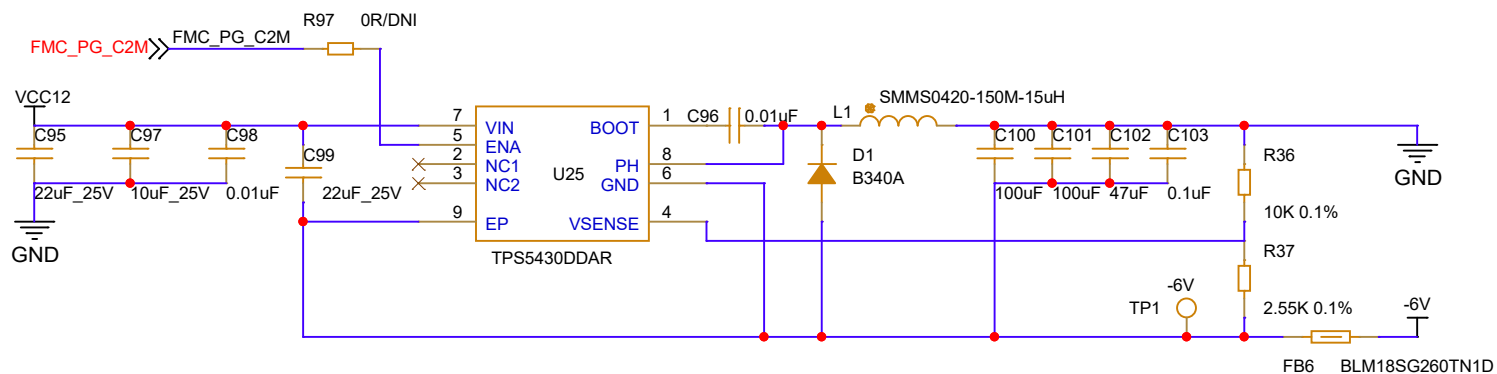

$$V_{out} = 0.800 * (R1/R2 + 1)$$

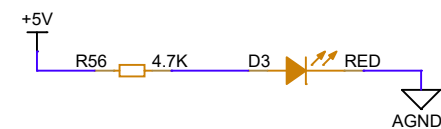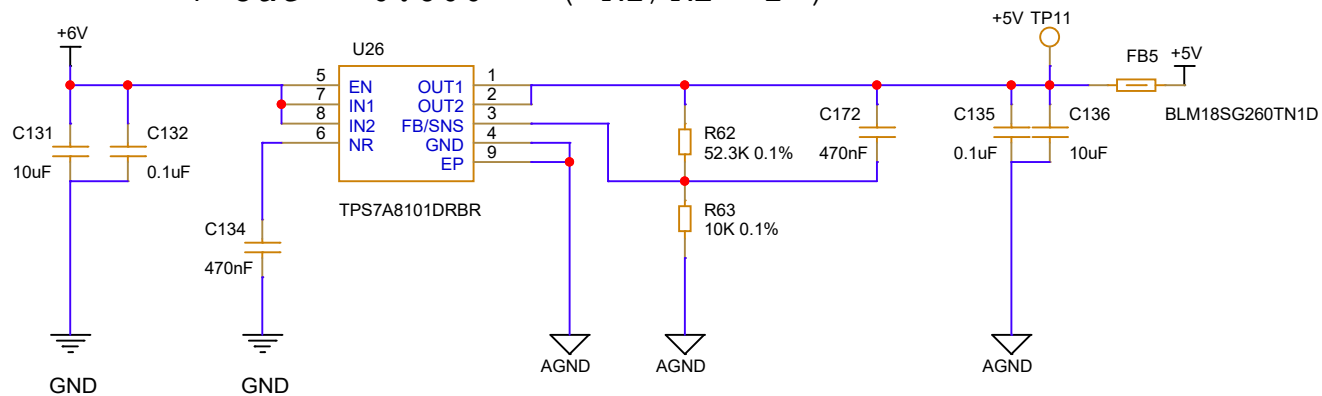

$$V_{out} = V_{ref} * (R1/R2 + 1) \quad V_{ref} = -1.175V$$

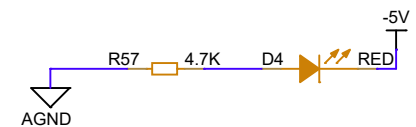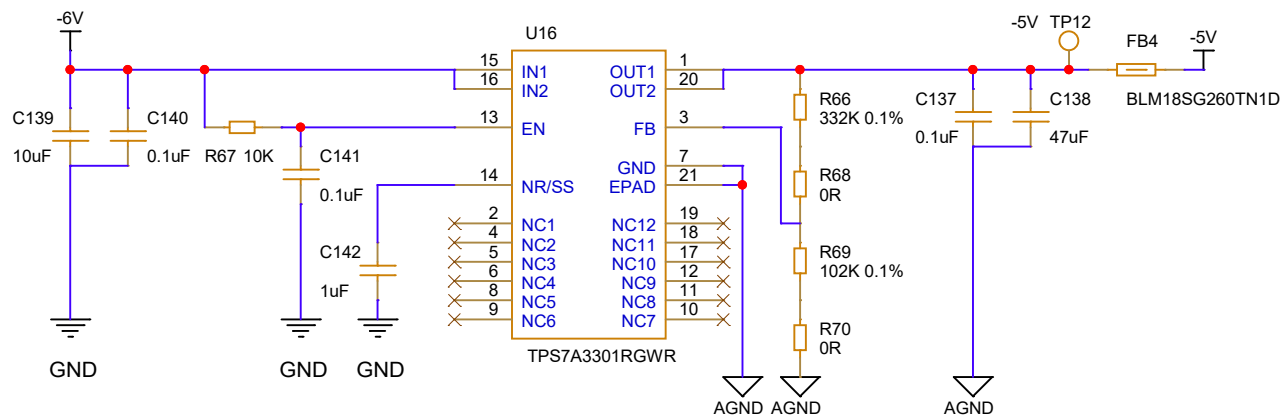

武汉芯路恒科技有限公司

Title		
ACM9253		
Size	File	Version
A4	04_LDO	26.4.23
Date:	Tuesday, June 02, 2026	Sheet 4 of 5



